



T20
new



The new versatile weeder
for front and rear use



> THE NEW WEEDER POLYVALENT FEATURES

The new T20 weeder for row crops is robust, versatile, light and reliable. Suitable for working on different crops in the most varied soil conditions, it guarantees superior work quality and durability over other machines available on the market.

The innovation that SFOGGIA has brought is visible in the frame, built with high strength steel th. 8 mm, positioned at a working height of 700 mm from the ground.

The weeding elements have been completely revised in the design.

The parallelogram is on bushings \varnothing 25 mm L = 100 mm with grease nipple and screws M14 class 8.8. The adjustment of the weeding springs (wide choice of models) is quick and independent.

The coupling / uncoupling of the elements is automatic with spring.

The weeding element can mount 1, 3, 5, 7 or 9 springs according to the configurations and can be equipped with a crushing kit.

The fertilizer spreader with patented volumetric distribution can be with 250 L PVC hopper or stainless steel tank from 930 up to 1130 L, with transmission for rubber wheels, grounded, cardan, hydraulic motor.

It is available on fixed frame, fixed with road towing kit, manual folding or hydraulic folding.

> WORKING ELEMENTS - VERSIONS

Standard element

Each element is equipped with a standard iron wheel on bearings to control the depth by means of an easily adjustable.

The depth wheel has an excursion of 120 mm.






Previously the element has a parallelogram with a maximum excursion of 260 mm and a new system of work pressure control.

- Corn-Sunflower element (70/75/80 cm) with 5 flex springs with 150mm hoes, with or without sheet metal protection plant or toothed disk.
- Beet-Soy bean element (45/50 cm) with 3 flex springs, with 105mm hoes, with or without sheet metal plant protection plant or toothed disk.
- Cotton element (90 cm) with 7 flex springs with 150 (200 mm on request) hoes, with or sheet metal plant protection protector or toothed disk.
- Vegetable element (20/30 cm) with 1 flex or ZD spring with or without protection plate or band disk.

The weeding element can be configured with vibro springs and hoes of different diameters.

The new weeding element is so modular that it can be assembled in two different ways to make the machine for use in front of the tractor or on the back.

Possibility to have customized configurations by creating special frames.

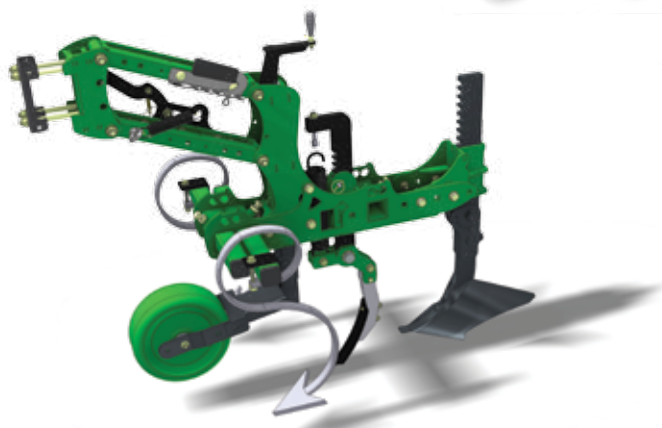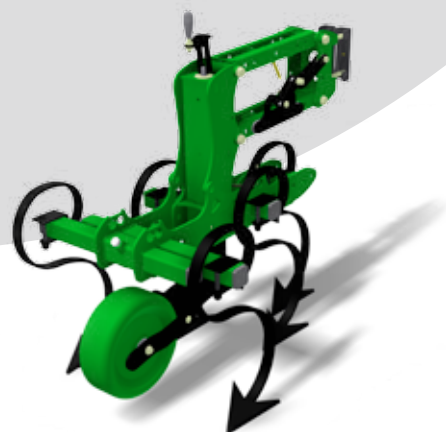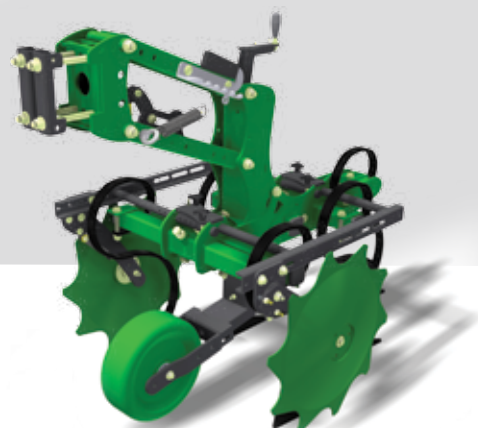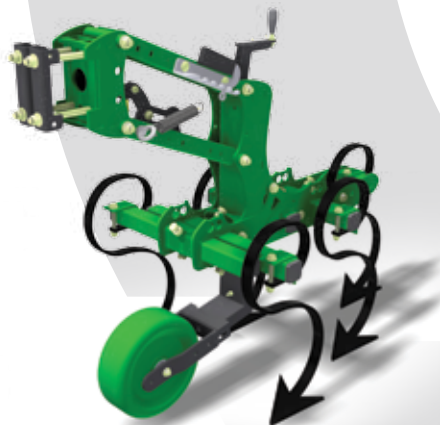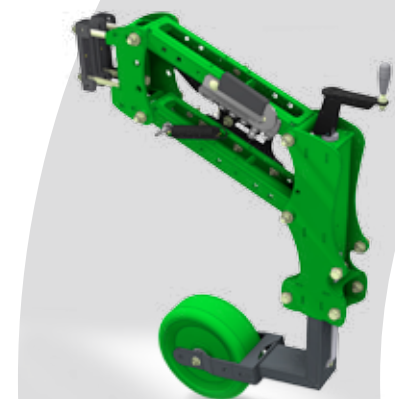

Crushing maize element

2 springs + central clod crusher with Ø10 mm ridger spring + 250 mm fixed rear filling spring with safety pin (no front version).



Back Crusher Spring



Back hoe Spring



Ridger with adjustable wings



Filling Discs



Star Rubber Teeth kit



Hydraulic Transport Kit



Manual Transport Kit

> ACCESSORIES ON REQUEST

The machine can have multiple accessories:

- rear furrowers for different uses;
- front wheels in iron or rubber;
- manual driving with seat or automatic;
- fertilizer central adjustment;
- manual or hydraulic road transport kit (depending on the model);
- star rubber teeth kit for weeding on the row;
- blowing fan fertilizer for first and sixth row on 6-row 70/75 cm foldable hydraulic version; Larger fan for
- fertilizer blowing for all rows on a 6-row 70/75 cm foldable hydraulic version; Larger fan for fertilizer
- blowing on all rows on 8-row 70/75 cm hydraulic folding version;
- rear harrow;
- loading ladder;
- fertiliser inspection stairs;
- microgranulator;
- variator supplement for fertilizer;
- auger with stainless steel tank for fertilizer loading with hydraulic drive; reinforcement spring;
- stainless steel fertilizer hopper;
- distributor application for herbs;
- pair of directional discs;
- hydraulic folding frame kit on 4-row 70/75 cm manual folding version;
- on request furrow coulters for fertilizer distribution deep into the soil;
- rubber depth wheel.

> FRAME

There are various types of frames to choose from based on model and machine version available from 2 files to 24 files:

- fixed frame
- manual folding frame
- hydraulic folding frame
- frame with double hydraulic folding

fixed frame



Fide Frame Manual Folding Frame



hydraulic folding frame





> EASY, VERSATILE, ROBUST



// T20 new NS



Front or rear fertilizer spreader with a second category three-point attachment.

It can have a 930 L stainless steel fertilizer hopper (1130 L with extension) or a 250 L PVC hopper.

The transmission can be with a grounded wheel, rubber wheels or cardan.

The fertilizer distribution is volumetric with easy opening of the volumetric distributor for daily cleaning.

The fertilizer hopper can have centralized regulation of the distributors or individual adjustment.

Available in fixed frame, hydraulic folding, fixed frame with side arms with manual or hydraulic folding

// T20 new VG



Fertilizer spreader with three-point hitch.

It can have a 930 L stainless steel fertilizer hopper (1130 L with extension) or in 250 L PVC hopper and adjustable shoe furrowers. On request microgranulator hopper of 18 or 32 L depending on the need and mechanical or hydraulic row marker.

The transmission is with tractor wheels, with gear variator.

The fertilizer distribution is volumetric with easy opening of the volumetric distributor for daily cleaning.

The fertilizer hopper can have centralized regulation of the distributors or individual adjustment.

Available in fixed frame and hydraulic folding.





Via Feltrina Sud, 170
31044 Montebelluna
Treviso - Italy
www.sfoggia.com

T +39 0423 24041-42
T +39 0423 24014
info@sfoggia.com



T20
new